


# Gewindestift

mit Schlitz und Druckzapfen Form S DIN 6332

**Halder**

Werkstoff

Stahl

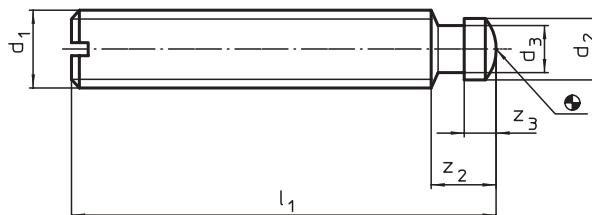

Bestell-Nr.	d1	l1	d2 h11	d3	z2	z3	$\frac{g}{g}$ g
T 32884	M 6	30	4.5	4.0	6.0	2.5	4.9
T 32885	M 6	50	4.5	4.0	6.0	2.5	8.4
T 32886	M 8	40	6.0	5.4	7.5	3.0	11.8
T 32887	M 8	60	6.0	5.4	7.5	3.0	18.1
T 32888	M 10	60	8.0	7.2	9.0	4.5	27.5
T 32889	M 10	80	8.0	7.2	9.0	4.5	37.5
T 32890	M 12	60	8.0	7.2	10.0	4.5	40.0
T 32891	M 12	80	8.0	7.2	10.0	4.5	55.0
T 32892	M 12	100	8.0	7.2	10.0	4.5	69.0
T 32893	M 16	80	12.0	11.0	12.0	5.0	100.0
T 32894	M 16	100	12.0	11.0	12.0	5.0	126.0
T 32895	M 16	125	12.0	11.0	12.0	5.0	160.0
T 34127	M 20	100	15.5	14.4	14.0	5.5	190.0
T 34128	M 20	125	15.5	14.4	14.0	5.5	240.0
T 34129	M 20	150	15.5	14.4	14.0	5.5	290.0

Bemaßungen, wenn nicht anders angegeben in Millimeter (mm).